

Siedle Group

NOVOHALL Rotary Sensor Touchless

RFE-3200 Ratiometric

Mobile Applications











Special Features

- Touchless hall technology
- Electrical range up to 360°
- 2 part design, mechanically decoupled
- High protection class IP67, IP68, IP69K
- Resolution up to 12 bit
- Wear-free
- Temperature range -40 °C to +125 °C
- One and multi-channel versions
- Optimized for use in mobile applications with highest EMC requirements such as ISO pulses and high interferences to ISO 11452 and ECE-Standard
- Suitable for safety-related applications according to DIN EN ISO 13849
- Other configurations see separate data sheets

Applications

- Mobile working machines (industrial trucks, construction machinery, agricultural and forestry machinery)
- Marine applications

The 2 part design consisting of sensor and magnetic position marker offers great flexibility when mounting. The absence of shaft and bearing makes the assembly much less sensitive to axial and radial application tolerances - separate couplings are obsolete. Measurements can be made transmissively through any non-ferromagnetic material.

With its completely encapsulated electronics the sensor is perfectly suited for use in harsh environments.

Single and multi-channel versions are available and suitable for use in safety-related applications.

Description


Material	Housing: high grade, temperature resistant plastic PBT GF30 with stainless steel inserts
Mounting	With 2 pan head screws M4x18 (included in delivery)
Fastening torque of mounting	max. 200 Ncm
Electrical connection	6-pin MQS-connector, code A, tinned contact according to drawing AMP-114-18063-126, Index A1 (Connector: AMP P/N 1-967616-1)

Mechanical Data

Dimensions	See dimension drawing
Mechanical travel	360° continuous
Weight	approx. 50 g



Ordering Specifications

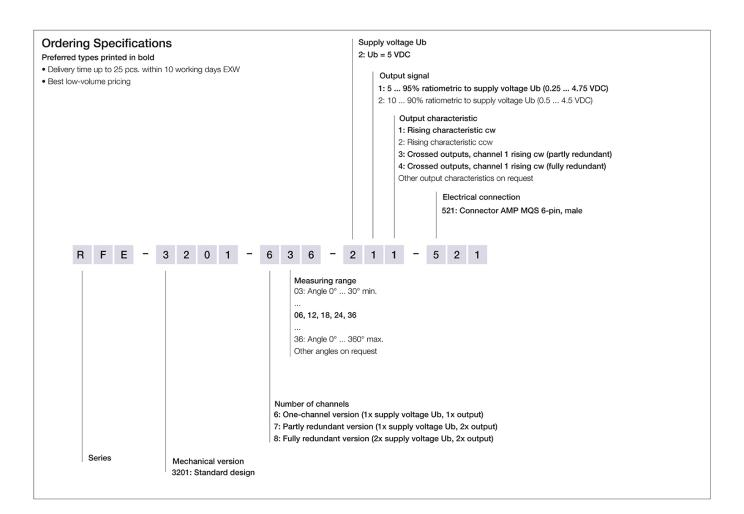


Accessories included in delivery

• 2x Pan head screws M4x18



Drawing

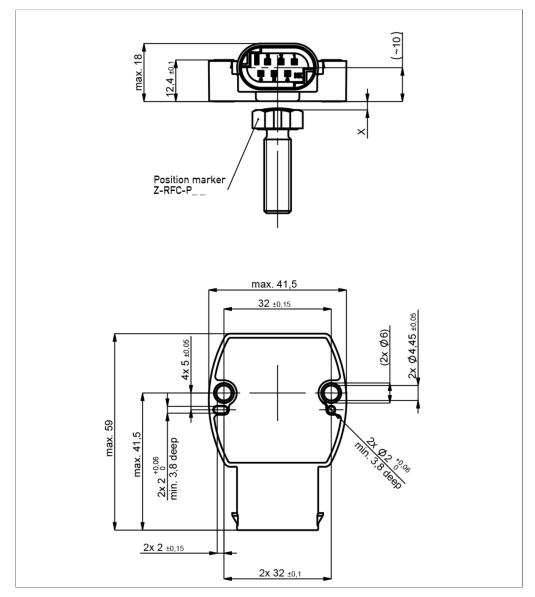

CAD data see www.novotechnik.de/en/download/caddata/



When the marking of the position marker points towards the connector, the sensor is near the electrical center position.



Technical Data

Туре	RFE-322521
	Ratiometric
Output signal	ratiometric to supply voltage Ub
	5 95% (0.25 4.75 V)
	10 90% (0.5 4.5 V)
Load	≥5 kQ
Number of channels	1/2
Diagnosis	activated (in case of error, output signal is outside of the plausible signal range)
Update rate	typ. 3.4 kHz
Measuring range	0 30° up to 0 360° in 10°-steps
Independent linearity	≤ ±0.5 %FS
Resolution	12 bits
Repeatability	typ. ≤ ±0.1°
Hysteresis	typ. < ±0.1°
	Only measuring range 360°: typ. < 0.25° (lower hysteresis on request)
Temperature error	Measuring range 30 170°: typ. ±0.7 %FS, Measuring range ≥ 180°: typ. ±0.35 %FS
Supply voltage Ub	5 VDC (4.5 5.5 VDC)
Current consumption w/o load	typ. 12 mA per channel
Overvoltage protection	24 VDC (60 min.)
Polarity protection	yes (supply lines and outputs)
Short circuit protection	yes (vs. GND and supply voltage Ub)
Insulation resistance (500 VDC)	≥ 10 MΩ
Environmental Data	
Max. operational speed	Mechanically unlimited
Vibration IEC 60068-2-6	20 g, 5 2000 Hz, Amax = 0.75 mm
Shock IEC 60068-2-27	50 g, 6 ms
Protection class ISO 20653	IP67 / IP68 / IP69K
Operating temperature	-40 +125°C
Life	Mechanically unlimited
Functional safety	Suitable for safety-related applications according to ISO 13849 after customer validation.
	Further safety data (DCavg) and support for functional safety are available on request.
MTTF (IEC 60050)	1652 years (one-channel), 824 years (partly redundant, per channel) or 826 years (fully redundant, per channel)
MTTFd (EN ISO 13849-1 parts count	3304 years (one-channel), 1648 years (partly redundant, per channel) or 1653 years (fully redundant, per channel)
method, w/o load)	
MTTFd-certificate	https://www.novotechnik.de/en/downloads/certificates/mttfd-certificates/
Traceability	Serial number on type labeling: production batch of the sensor assembly and relevant sensor components
EMC Compatibility	
ISO 10605 ESD (Handling/Component)	8 kV / 15 kV
ISO 11452-2 Radiated HF-fields	100 V/m
ISO 11452-5 Radiated HF-Fields, stripline	200 V/m
CISPR 25 Radiated emission	Level 5
EN 13309 Construction machinery	
Emission/Immunity E1	acc. to ECE-R10
ISO 13766-1/-2 Construction machinery	On request




Connection Assignment


Signal	Connector	Connector	Connector	
	code 5	code 5	code 5	
	One-channel	Partly redundant	Fully redundant	
Supply voltage Ub 1	Pin 1	Pin 1	Pin 1	
GND 1	Pin 2	Pin 2	Pin 2	
Signal output 1	Pin 4	Pin 4	Pin 4	
Signal output 2	=	Pin 3	Pin 3	
Supply voltage Ub 2	-	-	Pin 6	
GND 2	-	-	Pin 5	
Not assigned	Pin 3, Pin 5, Pin 6	Pin 5, Pin 6	-	








Technical Data Output Characteristics

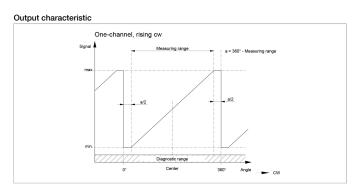










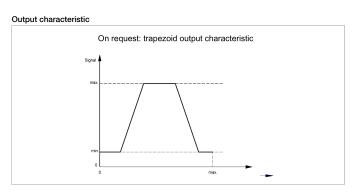














Z-RFC-P23

Position marker for fixation with threaded pin M4 (included in delivery)

Caution: For orientation of the output

characteristic please follow the user manual of the position marker!

Material PA6-GF
Max. permitted ± 3 mm


Max. permitted ± 3 mm radial offset

 P/N
 Pack. unit [pcs]

 400056074
 1

 400056085
 25





Z-RFC-P43

Position marker for fixation with threaded pin M4 (included in delivery)

Caution: For orientation of the output characteristic please follow the user manual of

the position marker!


Material PA6-GF

Max. permitted ± 3 mm

radial offset

P/N	Pack. unit [pcs]	
400105041	1	_
400105042	25	





Z-RFC-P30


Position marker for frontal fixation with 2 cylinder screws M3x8 (included in delivery).

Material PBT-GF
Max. permitted ± 1.5 mm

Max. permitted ± 1.5 mr radial offset

P/N	Pack. unit [pcs]
400056086	1
400056087	25





7-RFC-P31

Position marker for frontal fixation with 2 cylinder screws M3x8 (included in delivery).


Material PBT-GF


Max. permitted ± 3 mm

radial offset

P/N Pack. unit [pcs]
400056088 1
400056089 25





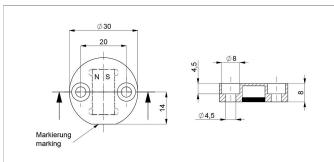

Position marker for frontal fixation with 2 cylinder head screws M4x20 (with microencapsulation, included in delivery).

Attention: Closed side of position marker faces the active side of sensor.

Material Aluminium, anodized


Max. permitted ± 4 mm

radial offset

Operating temp. -40 ... +125°C

P/N Pack. unit [pcs] 400106735 400106736 25





Z-RFC-P18

Screw position marker M10 x 25 mm, similar

DIN 933, magnet potted


Material Aluminium, anodized

Max. permitted ± 3 mm

radial offset

P/N Pack. unit [pcs] 400104756 400104757 25





Z-RFC-P19


Screw position marker M8 x 25 mm, similar DIN 933/ISO 4017, magnet potted

Material Aluminium, anodized Max. permitted ± 1.5 mm

radial offset

P/N Pack. unit [pcs] 400104754 400104755 25





Screw position marker M10 x 25 mm, similar

DIN 933

Material Aluminium, anodized ± 3 mm


Max. permitted

radial offset

P/N	Pack. unit [pcs]
400104758	1
400104759	25







Z-RFC-P03


Magnet for direct application onto customer's shaft (see user manual).

We recommend mounting on non-magnetizable materials, otherwise the specified working distances will vary (e.g. reduction of approx. 20% with axial mounting on a magnetizable shaft).

Max. permitted ± 1.5 mm radial offset

P/N	Pack. unit [pcs]	
400005658	1	
400056081	50	





Z-RFC-P04

Magnet for direct application onto customer's shaft (see user manual).

We recommend mounting on non-magnetizable materials, otherwise the specified working distances will vary (e.g. reduction of approx. 20% with axial mounting on a magnetizable shaft). Max. permitted ± 3 mm

radial offset


P/N	Pack. unit [pcs]
400005659	1
400056082	50



Working Distances Position Markers [mm] - One-channel Versions

Z-RFC-P03	Z-RFC-P04	Z-RFC-P18	Z-RFC-P19	Z-RFC-P20	Z-RFC-P22	Z-RFC-P23	Z-RFC-P30	Z-RFC-P31	Z-RFC-P43
0.4 1.9	2 4.7	0 4	0 1.8	2 4.7	4.1 8.9	2 4.7	0.4 1.9	2 4.7	0 2.4
Working Dietar	nces Position Mark	ere [mm] - Redund	lant Varsions						
		ers [mm] - Redund		7 DEC DO0	7 DEC D00	7 DEC D00	7 DEC D00	7 DEC D04	7 DEC D40
Working Distar Z-RFC-P03	Z-RFC-P04	zers [mm] - Redund	Z-RFC-P19	Z-RFC-P20	Z-RFC-P22	Z-RFC-P23	Z-RFC-P30	Z-RFC-P31	Z-RFC-P4

Lateral Magnet Offset



Lateral magnet offset will cause additional linearity error. The angle error, which is caused by radial displacement of sensor and position marker depends on the used position marker or magnet.


Additional Linearity Error at Radial Displacement - One-channel Versions Z-RFC-P02 / P04 / P08 Z-RFC-P41 / P43 / P47

Z-RFC-P02 / P04 / P08	Z-RFC-P41 / P43 / P47	Z-RFC-P03 / P30	Z-RFC-P18	Z-RFC-P19	Z-RFC-P22
Z-RFC-P20 / P23 / P31					
0.5 mm: ±0.4°	0.5 mm: ±0.4°	0.5 mm: ±1.4°	0.5 mm: ±0.7°	0.5 mm: ±1.3°	1.0 mm: ±0.8°
1.0 mm: ±1.1°	1.0 mm: ±1.1°	1.0 mm: ±3.7°	1.0 mm: ±1.3°	1.0 mm: ±2.6°	2.0 mm: ±1.8°
2.0 mm: ±3.5°	2.0 mm: +3.5°	2.0 mm: -	2.0 mm: ±3.3°	2.0 mm: -	4.0 mm: ±5.4°
Additional Linearity Error a	t Radial Displacement - Redun				
Additional Linearity Error a	t Radial Displacement - Redun Z-RFC-P41 / P43 / P47	dant Versions Z-RFC-P03 / P30	Z-RFC-P18	Z-RFC-P19	Z-RFC-P22
	•		Z-RFC-P18	Z-RFC-P19	Z-RFC-P22
Additional Linearity Error a Z-RFC-P02 / P04 / P08 Z-RFC-P20 / P23 / P31	•		Z-RFC-P18 0.5 mm: ±1.1°	Z-RFC-P19 0.5 mm: ±2.3°	Z-RFC-P22 1.0 mm: ±1.1°
Additional Linearity Error a Z-RFC-P02 / P04 / P08	Z-RFC-P41 / P43 / P47	Z-RFC-P03 / P30			



Connector System MQS





MQS Micro Quadlok System

Connector kit including

- 1 plug socket (female), AMP P/N 1-967616-1
- 6 tinned contacts for cable cross-section area
 0.25 ... 0.35 mm² (AWG 22), AMP-P/N 963727-1 or 5-962885-1
- 6 single conductor sealings AMP P/N 967067-2

Operating temp. -40 ... +120°C

-		
P/N	Туре	
400005666	EEM-33-34	



Novotechnik Messwertaufnehmer OHG P.O.Box 4220 73745 Ostfildern (Germany) Horbstrasse 12 73760 Ostfildern (Germany) Phone +49 711 4489-0 Fax +49 711 4489-118 info@novotechnik.de www.novotechnik.de



© Nov 18, 2021