

NOVOHALL Rotary Sensor Touchless

RFE-3200 CANopen Mobile Applications









Special Features

- Touchless hall technology
- Electrical range 360°
- 2 part design, mechanically decoupled
- High protection class IP67, IP68, IP69K
- Resolution 14 bit
- Wear-free
- Temperature range -40 °C to +105 °C
- One and multi-channel versions
- Optimized for use in mobile applications with highest EMC requirements such as ISO pulses and high interferences to ISO 11452, exceeds E1 requirements
- Other configurations see separate data sheets

Applications

- Mobile working machines (industrial trucks, construction machinery, agricultural and forestry machinery)
- Marine applications


The 2 part design consisting of sensor and magnetic position marker offers great flexibility when mounting. The absence of shaft and bearing makes the assembly much less sensitive to axial and radial application tolerances - separate couplings are obsolete. Measurements can be made transmissively through any non-ferromagnetic material.

The sensor is perfectly suitable for use in harsh environmental conditions through the completely encapsulated electronics.

Description		
Material	Housing: high grade, temperature resistant plastic PBT GF30 with stainless steel inserts	
Mounting	With 2 pan head screws M4x18 (included in delivery)	
Fastening torque of mounting	max. 200 Ncm	
Electrical connection	6-pin MQS-connector, code A, tinned contact according to drawing AMP-114-18063-126, Index A1 (Connector: AMP P/N 1-967616-1)	
Mechanical Data		
Dimensions	See dimension drawing	
Mechanical travel	360° continuous	
Weight	approx. 50 g	



Ordering Specifications

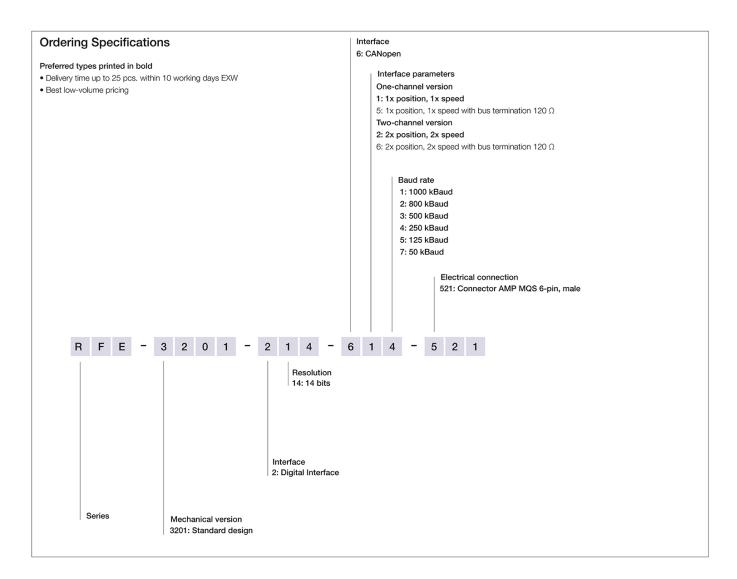


Accessories included in delivery

• 2x Pan head screws M4x18



Drawing

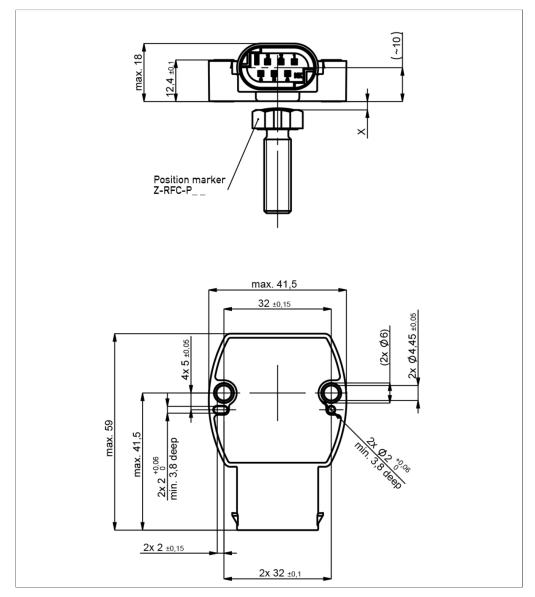

CAD data see www.novotechnik.de/en/download/caddata/



When the marking of the position marker points towards the connector, the sensor is near the electrical center position.



Technical Data



Туре	RFE-32214-6521
	CANopen
Measured variables	Position and speed
Measuring range	360°
Measuring range speed	0 1600 rpm
Number of channels	1/2
Protocol	CANopen protocol to CiA DS-301 V4.2.0, Device profile DS-406 V3.2 Encoder Class C2, LSS services to CiA DS-305 V1.1.2
Programmable parameters	Position, speed, cams, working areas, rotating direction, scale, offset, node ID, baud rate
Diagnosis	activated (in case of error, output signal is outside of the plausible signal range)
Node ID	1 127 (default 127)
Baud rate	50 1000 kBaud
Update rate	1 kHz
Resolution	14 bits
Resolution speed	360°/2^14 ≈ 0.022°/ms
Linearity	≤ ±0.5 %FS
Repeatability	≤±0.36°
Hysteresis	≤±0.36°
Temperature error	±0.2 %FS
Supply voltage Ub	12/24 VDC (8 34 VDC)
Current consumption at Power-on	≤ 50 mA
Power drain w/o load	< 0.4 W
Overvoltage protection	45 VDC (permanent)
Polarity protection	yes (supply lines)
Short circuit protection	yes (output vs. GND and supply voltage up to 40 VDC)
Insulation resistance (500 VDC)	≥ 10 MΩ
Bus termination internal	120 \Omega (optionally)
Environmental Data	
Max. operational speed	Mechanically unlimited
Vibration IEC 60068-2-6	20 g, 5 2000 Hz, Amax = 0.75 mm
Shock IEC 60068-2-27	50 g, 6 ms
Protection class ISO 20653	P67 / P68 / P69K
Operating temperature	-40 +105°C
Life	Mechanically unlimited
Functional safety	If you need assistance in using our products in safety-related systems, please contact us
MTTF (IEC 60050)	843 years (one-channel) or 819 years (two-channel, per channel)
Traceability	Serial number on type labeling: production batch of the sensor assembly and relevant sensor components
EMC Compatibility	delia number on type labeling, production batch of the sensor assembly and relevant sensor components
ISO 10605 ESD (Handling/Component)	8 kV
ISO 11452-2 Radiated HF-fields	100 V/m
ISO 11452-5 Radiated HF-Fields, stripline	200 V/m
CISPR 25 Radiated emission	Level 3
ISO 7637-2 Transient Emissions	Level 3
ISO 7637-2 Pulses on supply lines	(1, 2a, 2b, 3a, 3b, 4, 5) Level 4
ISO 7637-2 Pulses on supply lines	(1, 2a, 20, 3a, 30, 4, 5) Level 4 Level 4
ISO 16750 Pulses on output lines	Starting profile Level 4 @12 V / Level 3 @24 V
Emission/Immunity	Exceeds E1 requirements
EITIISSIOIT/ITTITTIUTIILY	Exceeds El requirements




Connection Assignment

Connector
code 5
Pin 1
Pin 2
Pin 3, pin 6
Pin 4, pin 5







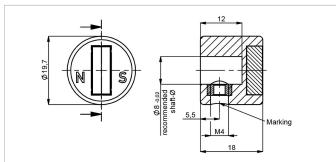

Position marker for fixation with threaded pin M4 (included in delivery)

Caution: For orientation of the output

characteristic please follow the user manual of the position marker!


PA6-GF Material

Max. permitted ± 3 mm

radial offset

P/N Pack. unit [pcs] 400056074 400056085 25



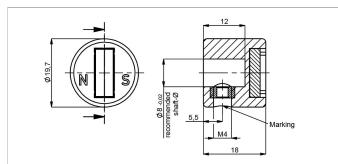

Z-RFC-P43

Position marker for fixation with threaded pin M4 (included in delivery)

Caution: For orientation of the output characteristic please follow the user manual of


the position marker!

Material PA6-GF

Max. permitted ± 3 mm radial offset

Pack. unit [pcs] P/N 400105041 400105042



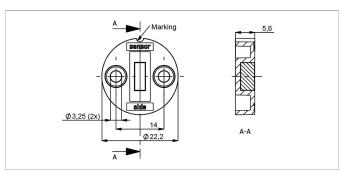

Z-RFC-P30

Position marker for frontal fixation with 2 cylinder


screws M3x8 (included in delivery).

Material PBT-GF Max. permitted ± 1.5 mm

radial offset

P/N Pack. unit [pcs] 400056086 400056087 25



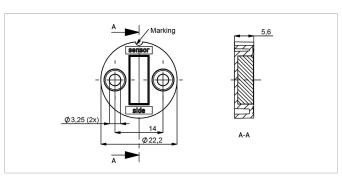

Position marker for frontal fixation with 2 cylinder


screws M3x8 (included in delivery). PBT-GF


Material Max. permitted ± 3 mm

radial offset

P/N Pack. unit [pcs] 400056088 25 400056089





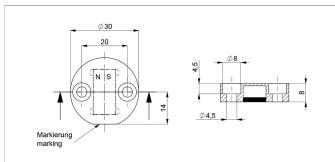

Position marker for frontal fixation with 2 cylinder head screws M4x20 (with microencapsulation, included in delivery).

Attention: Closed side of position marker faces the active side of sensor.

Material Aluminium, anodized


Max. permitted ± 4 mm

radial offset

Operating temp. -40 ... +125°C

P/N Pack. unit [pcs] 400106735 400106736 25



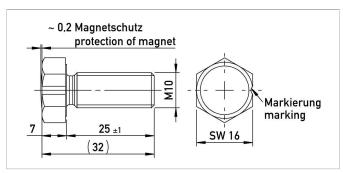

Z-RFC-P18

Screw position marker M10 x 25 mm, similar


DIN 933, magnet potted

Aluminium, anodized Material

Max. permitted ± 3 mm

radial offset P/N Pack. unit [pcs] 400104756 400104757 25



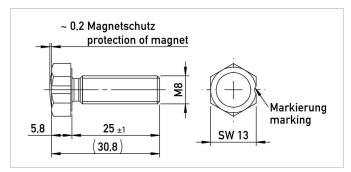

Z-RFC-P19

Screw position marker M8 x 25 mm, similar DIN 933/ISO 4017, magnet potted


Aluminium, anodized Max. permitted ± 1.5 mm

radial offset

P/N Pack. unit [pcs]

400104754 400104755 25



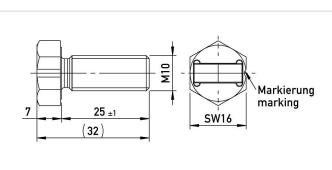

Screw position marker M10 x 25 mm, similar

DIN 933

Material Aluminium, anodized ± 3 mm


Max. permitted

radial offset

P/N	Pack. unit [pcs]
400104758	1
400104759	25





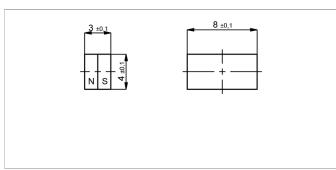

Z-RFC-P03

Magnet for direct application onto customer's shaft (see user manual).


We recommend mounting on non-magnetizable materials, otherwise the specified working distances will vary (e.g. reduction of approx. 20% with axial mounting on a magnetizable shaft).

Max. permitted ± 1.5 mm

radial offset

P/N	Pack. unit [pcs]
400005658	1
400056081	50



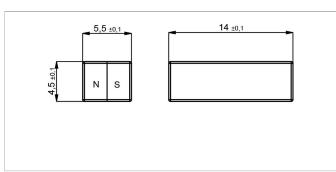

Z-RFC-P04

Magnet for direct application onto customer's shaft (see user manual).

We recommend mounting on non-magnetizable materials, otherwise the specified working distances will vary (e.g. reduction of approx. 20% with axial mounting on a magnetizable shaft). Max. permitted ± 3 mm

radial offset

 P/N
 Pack. unit [pcs]

 40005659
 1

 400056082
 50




Working Distances Position Markers [mm] - One-channel Versions

Z-RFC-P03	Z-RFC-P04	Z-RFC-P18	Z-RFC-P19	Z-RFC-P20	Z-RFC-P22	Z-RFC-P23	Z-RFC-P30	Z-RFC-P4
0.7 2.2	2.3 5	0 4.5	0 2.2	2.3 5	4.1 8.9	2.3 5	0.7 2.2	0 2.7
Working Distance	es Position Markers	[mm] - Redundant \	lersions					
	ces Position Markers	[mm] - Redundant \	ersions					
Working Distance Z-RFC-P03	zes Position Markers	[mm] - Redundant \	/ersions Z-RFC-P19	Z-RFC-P20	Z-RFC-P22	Z-RFC-P23	Z-RFC-P30	Z-RFC-P4

Lateral Magnet Offset

2.0 mm: ±5,2°



Lateral magnet offset will cause additional linearity error. The angle error, which is caused by radial displacement of sensor and position marker depends on the used position marker or magnet.

Additional Linearity Error at Radial Displacement - One-channel Versions

2.0 mm: ±5.2°

Additional Efficantly Effor at 11	adiai Diopiaconioni Cinc onamici vo	1010110			
Z-RFC-P02 / P04 / P08	Z-RFC-P41 / P43 / P47	Z-RFC-P03 / P30	Z-RFC-P18	Z-RFC-P19	
Z-RFC-P20 / P23 / P31					
0.5 mm: ±0.4°	0.5 mm: ±0.4°	0.5 mm: ±1.4°	0.5 mm: ±0.7°	0.5 mm: ±1.3°	
1.0 mm: ±1.1°	1.0 mm: ±1.1°	1.0 mm: ±3.7°	1.0 mm: ±1.3°	1.0 mm: ±2.6°	
2.0 mm: ±3.5°	2.0 mm: ±3.5°	2.0 mm: -	2.0 mm: ±3.3°	2.0 mm: -	
Additional Linearity Error at R	adial Displacement - Redundant Vers	ions			
Z-RFC-P02 / P04 / P08	Z-RFC-P41 / P43 / P47	Z-RFC-P03 / P30	Z-RFC-P18	Z-RFC-P19	
Z-RFC-P20 / P23 / P31					
0.5 mm: ±0.7°	0.5 mm: ±0.7°	0.5 mm: ±2.5°	0.5 mm: ±1.1°	0.5 mm: ±2.3°	
1.0 mm: ±1.8°	1.0 mm: ±1.8°	1.0 mm: ±6.4°	1.0 mm: ±2°	1.0 mm: ±4.5°	

2.0 mm: -


2.0 mm: ±4.6°

2.0 mm: -



Connector System MQS





MQS Micro Quadlok System

Connector kit including

- 1 plug socket (female), AMP P/N 1-967616-1
- 6 tinned contacts for cable cross-section area
 0.25 ... 0.35 mm² (AWG 22), AMP-P/N 963727-1
 or 5-962885-1
- 6 single conductor sealings AMP P/N 967067-2

Operating temp. -40 ... +120°C

P/N	Туре
400005666	EEM-33-34



Novotechnik Messwertaufnehmer OHG P.O.Box 4220 73745 Ostfildern (Germany) Horbstrasse 12 73760 Ostfildern (Germany) Phone +49 711 4489-0 Fax +49 711 4489-118 info@novotechnik.de www.novotechnik.de



© Nov 18, 2021